




# BAND PASS FILTER 12-13.6 GHz

## F-BF-F3034

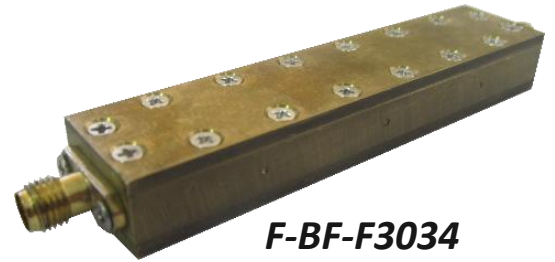

F-BF-F3034



### Specification

Frequency (GHz)	11.6	12	12-13.6	13.6	14
S <sub>21</sub>   (dB)	-43.5	-1.9	-0.4 (typical)	-2.8	-30
S <sub>11</sub>   (dB)			<-14		

### Performance

Frequency	S <sub>21</sub>
11.00 GHz	-78.672
11.20 GHz	-68.819
11.40 GHz	-57.353
11.60 GHz	-43.449
11.80 GHz	-25.246
12.00 GHz	-1.926
12.20 GHz	-0.469
12.40 GHz	-0.381
12.60 GHz	-0.348
12.80 GHz	-0.428
13.00 GHz	-0.33
13.20 GHz	-0.404
13.40 GHz	-0.546
13.60 GHz	-2.803
13.80 GHz	-18.338
14.00 GHz	-29.413
14.20 GHz	-37.285
14.40 GHz	-43.21
14.50 GHz	-45.636

### Frequency Response

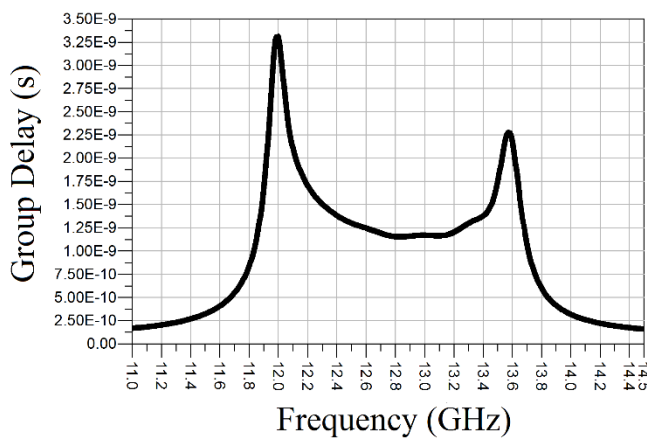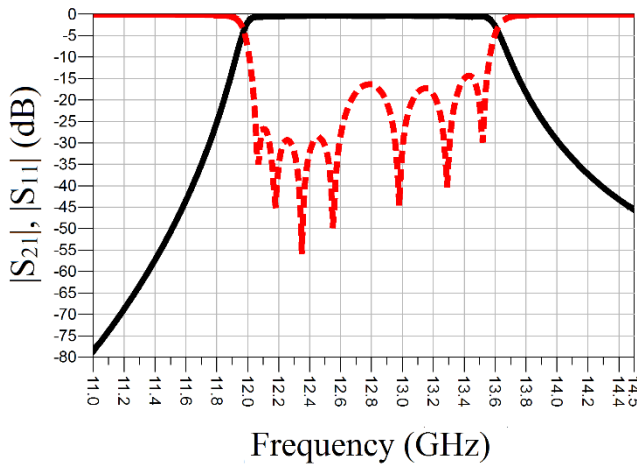

### Physical Dimensions

